


Applicable Standards/Codes

IAPMO certified to meet or exceed the following:

- ASME A112.18.1/CSA B125.1
- Uniform Plumbing Code
- National Plumbing Code of Canada
- ADA Compliant



Installation Dimensions

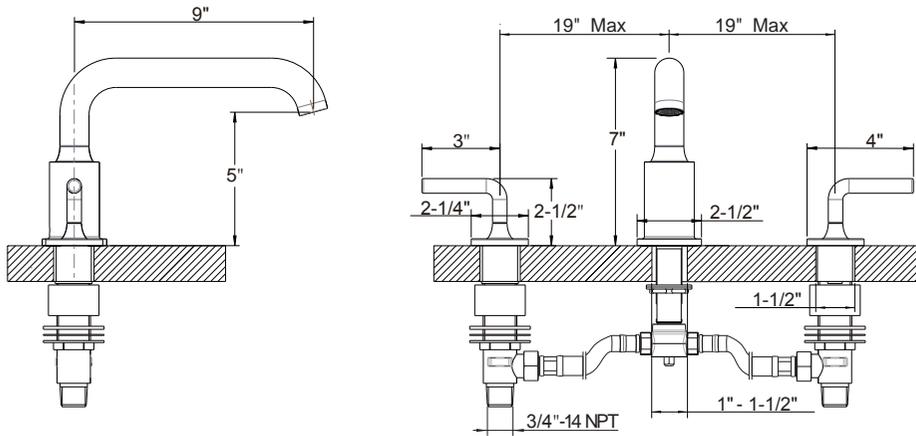

**Taos Deck-mount Tub Faucet Trim
17-02-T**

Installation Instructions



Warranty - This Crosswater London product is covered by a limited lifetime warranty. For full details, terms and conditions please visit our website. For further information contact: **Crosswater London**, 393 Fortune Blvd., Milford, MA 01757 www.crosswaterlondon.com
Toll free number: 844-XWATER-1 (844-992-8371) tel: 508-381-0433 fax: 508-381-6068 email: technical@crosswaterlondon.com

For ease of installation you will need:

- To read the installation instructions completely before beginning.
- To read all warnings, care, and maintenance information.

Anti-scald protection is the responsibility of the installer and according to applicable codes.


Before beginning installation, check for any damage that may have occurred during transport.

Note: Damage claims cannot be made during or after installation.




Installation Instructions

1




Remove the mud guards from the spout nipple assembly, the hot and cold valves.

2




Place the spout "O" ring under the spout and install spout on spout nipple assembly. Be sure the spout is firmly resting on the deck and secure the spout. Secure the spout with the setscrew.

3




Align the handle and place the handle and escutcheon assembly into the valve. Secure the assembly by turning the escutcheon clockwise. Repeat for hot valve.

4




Turn water supply on.

5



Remove the aerator with key. Turn the faucet handles on full for one minute to flush debris.

6



Re-install the aerator with key.

7



Installation complete.

Cleaning Instructions

Rinse away any traces of soap and gently dry with a clean, soft cloth after each use. Rinse completely with water and dry any overspray. This will maintain the finish and avoid water spotting.

To remove mineral deposits, use a 50/50 solution of white vinegar and water. Do not allow the solution to soak on the product.

Simichrome Polish® contains a protective film to enhance maintenance and is helpful in preventing water spot buildup. Follow instructions to ensure optimum results.

Never use an abrasive material such as a brush or scouring pad to clean the surface. The use of abrasive cleaners, cleansers or disinfectants will alter the surface finish and void the warranty.


Do not allow certain materials such as toothpaste, cologne, shaving cream, nail polish remover, vinegar, wine, drain and glass cleaners to remain on the surface. Prolonged contact will alter surface finishes and void the warranty.

We DO NOT recommend using any household cleaners as many can cause damage to the finish.

Please see the website for care instructions for specific finishes.

Replacement Parts

NO.	Description	Part No.
1	Washer, Key & Aerator	9Q1110PL
2	Handle Assembly	9Q1143XX
3	Set Screw & Allen Key	9Q1350NT

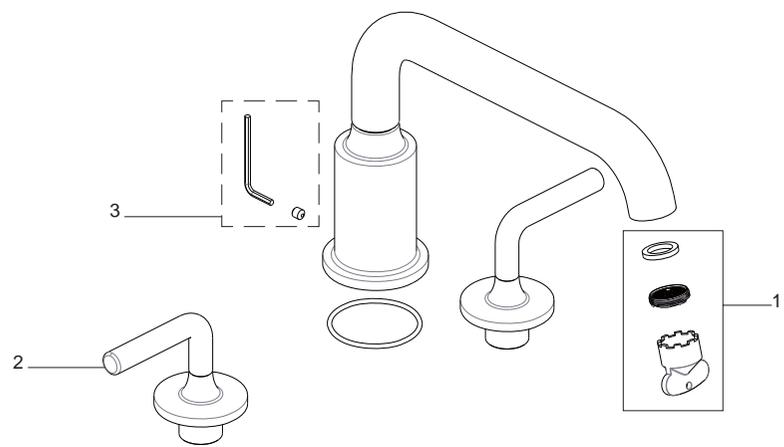

The diagram shows the handle assembly (2) and the aerator (1) with its washer, key, and set screw (3). The aerator is shown in an exploded view, highlighting its internal components.