


## MPRO 1000 THERMOSTATIC VALVE TRIM WITH SINGLE INTEGRATED VOLUME CONTROL - PHASE OUT

Polished Nickel

US-PRO1000RN

### SPECIFICATIONS


|                         |   |
|-------------------------|---|
| Barcode                 | 0   |
| Number of water outlets | 1   |
| Handle style            | Lever   |
| Flow rate               | 12 GPM  |
| Inlet connection size   | 3/4" NPT  |
| Outlet connection size  | 3/4" NPT  |
| Water pressure minimum  | 20 PSI  |
| Water pressure maximum  | Operating pressure of 60 PSI and static pressure of 144 PSI |
| Installation type       | Concealed   |
| IAPMO                   | Yes   |
| State of MA             | Yes   |

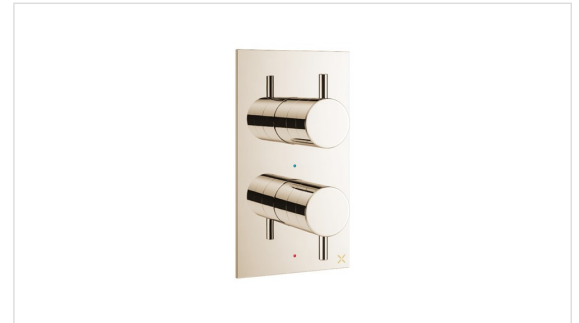

✓ Limited lifetime. Commercial



### AVAILABLE COLOR/FINISHES

| Color  | SKU          | Description     |
|--|--------------|-----------------|
|  | US-PRO1000RN | Polished Nickel |

MPRO 1000/1500/2500 Thermostatic Valve Trim

US-PRO1000

US-PRO1500

US-PRO2500

